



The FB40-4701-48DE 48 Fiber Dome Splice Closure is ideal for aerial, wall mount, and pole mount applications. Provides compact fiber optic splice protection. Manufactured of high quality ABS. Foundation sealed with silicon gum. Four splice trays included for up to 48 splice capacity.

Features

- 48 Splice Capacity with 4 Splice Trays Included
- Aerial, Wall Mount, and Pole Mount Installation
- High Quality ABS Construction
- Closure Sealed with Silicon Gum
- 3 Round and 1 Oval Cable Entry Port
- IP67 Waterproof Rating
- Heat Shrinkable Sealing

Physical Characteristics


- Enclosure Material: Black ABS Plastic
- Splice Tray Capacity: 4
- Splice Capacity: 48 Fibers
- Dimensions: 11.83"(H) x 5.51"(W)
- Weight: 4.19 lbs.
- Mounting Hardware Included

Outdoor Fiber Dome Splice Closure, 48 Splice Capacity, 4 Splice Trays

Outdoor Fiber Dome

Item Number:

Item# FB40-4701-48DE

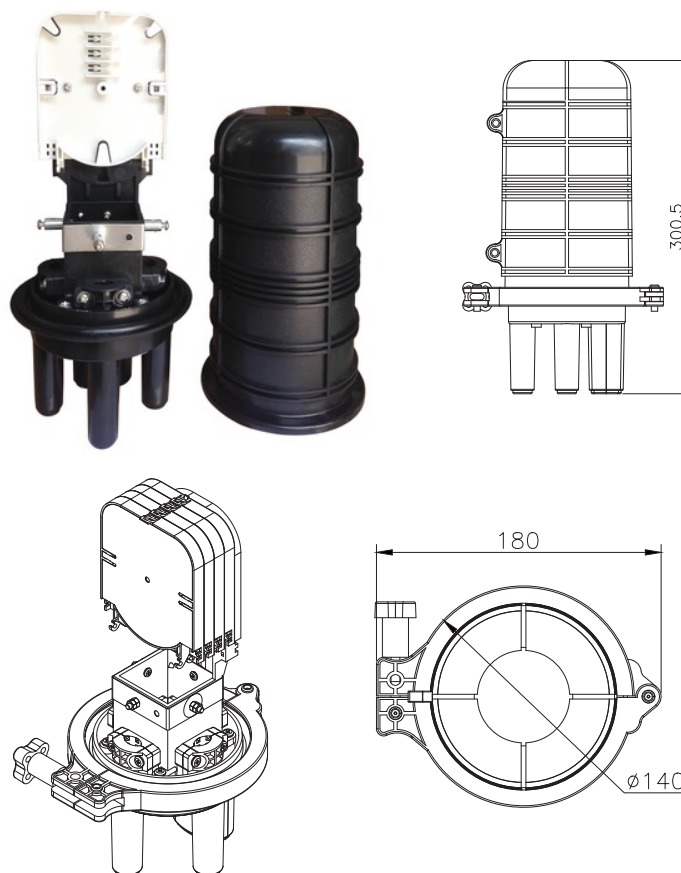

©2022 CRN Solutions Inc. dba. Primus Cable
All Rights Reserved.

Although Primus Cable makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Primus Cable provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Primus Cable be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Primus Cable has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Primus Cable products are subject to Primus Cable's standard terms and conditions of sale.

Primus Cable believes this product to be in compliance with EU RoHS (Directive 2002/EC, 27 Jan. 2003). Material manufactured prior to the compliance date may be in stock at Primus Cable facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Primus Cable's knowledge, information, and belief at the date any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification and regulations based on their individual usage of the product.

Primus Cable declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC

PrimusCable.com - (951) 824-1571